

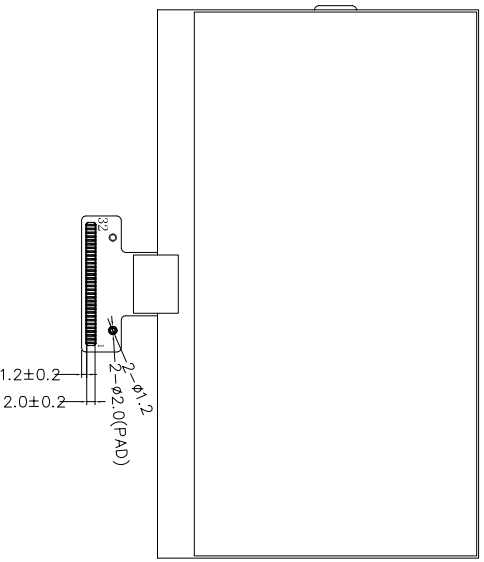


SYM	REV	DESCRIPTION	DATE
G-1		NEW DRAWING	2009.11.17

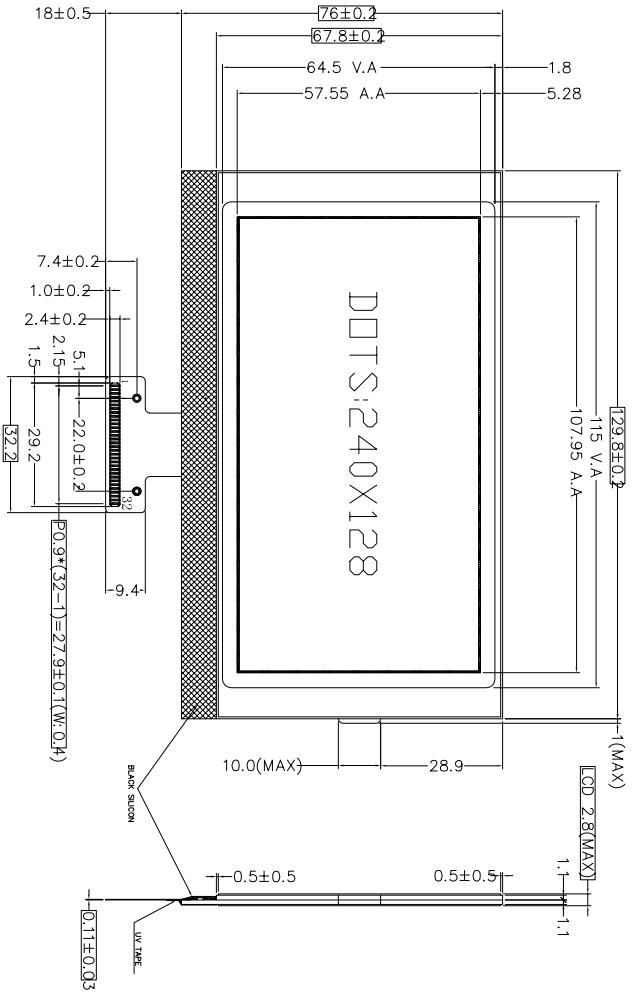

1.DISPLAY TYPE: STN/BLUE
 2.VIEWING DIRECTION: 6:00
 3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 4.IC: UC1698U
 5.OPERATING TEMP: -20°C--+70°C
 6.STORAGE TEMP: -30°C--+80°C
 7.Drive Method: 1/128duty 1/12bias
 8.LCD OPERATING VOLTAGE: 16.0V
 9.BACKLIGHT: 3.3V WITHOUT BACKLIGHT
 10.UNMARKED TOLERANCES: ±0.3mm
 11.THE CONTROLLED DIMENSION MASK TO BE :
 12.REQUIREMENT ON ENVIRONMENTAL PROTECTION: ROHS



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NC	NC	VLCDIN	VLCDIN	VS+	VS-	VBO-	VBI-	VBI+	VBO+	VD23	VDD	VSS	TS14	EM1	EM0
CS1	CS0	CD	WR1	WR0	RST	D0	D1	D2	D3	D4	D5	D6	D7	NC	NC

WYANG 南京罗姆液晶显示技术有限公司

DRAWN BY:	TITLE:	
ME CHECKED BY:	DWG NO: WYMN240128K3G	UNIT: mm
EE CHECKED BY:	SCALE:	SHEET NO: 1 OF 1
APPROVED BY:		